



## BUILDPOX, HB-114

High-Build  
Epoxy Paint

### Uses

Buildopox 124-HB is a high-build, modified two-component epoxy paint, which cures coating with good resistance to water, splashes of mineral oils, aliphatic hydrocarbons, and abrasion and impact. Limited resistance to aromatic and stronger solvents and to acids and oxidizing materials.

Buildopox 124-HB is a concrete or steel coating with no maximum recoating interval in EPOXY/POLYURETHANE systems.

CURING AGENT 124-HB-CA, polyamide, is typically for use above 5°C/41°F. Excellent for primed concrete surfaces.

Excellent on both Prepared and Primed concrete or steel surfaces.



UV Resistant



Chemical



Water



Heavy Duty

### Environment & Health

Follow the appropriate Occupational Health and Safety guidelines applicable to the location where the application is undertaken. For more information, please refer to the safety datasheets for the individual components.

### Packaging

The product is supplied in full units as a 2-component pack.

<b>Buildopox Part A</b>	20 Kg
<b>Buildopox Part B</b>	4 Kg
<b>Ratio</b>	5:1

### Curing Times

<b>Dry to touch</b>	3-4 hour
<b>Hard dry</b>	7 hours
<b>Full curing</b>	7 days
<b>Recoat interval, Min</b>	8 hour
<b>Recoat interval, Max</b>	14 days, See Remarks

### Additional Information

<b>Colours</b>	Grey As 2700
<b>Finish</b>	Semi-Gloss
<b>Solid Content (by Volume)-%</b>	75±5
<b>Theoretical spreading rate</b>	80 m <sup>2</sup> / one kit
<b>Flashpoint</b>	28°C/83°F
<b>Specific gravity</b>	1.360 kg/lit
<b>V.O.C.</b>	Max. 280gr/lit
<b>Shelf life</b>	1 Year (25°C / 77°F) from the time of production. Depending on storage conditions, mechanical stirring may be necessary before use.

CHEMSTUK Pty Ltd  
1/11 Industrial Avenue  
Thomastown  
Tel: +61 3 9936 0531  
[www.chemstuk.com](http://www.chemstuk.com)

➤ Buildopox 124-HB is a high-build, modified two-component epoxy paint, which cures coating with good resistance to water, splashes of mineral oils, aliphatic hydrocarbons, and abrasion and impact.

## Substrate Requirements

Concrete or screed substrate should be a minimum of 25 N/mm<sup>2</sup>, free from laitance, dust, and other contamination. The substrate should be dry to 75% RH as per ASTM F2170 (AS1884:2012).



Low Maintenance



Wear Resistant



Easy Application



High Durability

## Surface Preparation

The surface should ideally be grinded or sanded. Concrete etching is an altered way to prepare the concrete floor. The surface must be completely clean and dry prior to application and its temperature must be at least 3°C above the dew point to avoid condensation.

The surface should be stable, firm, dry and free of dust, sand, loose old paint, dirt, grease and oil. It is recommended to apply mid-coat before exceeding the maximum interval of primer.

## Mixing

Stir Base A to re-disperse any settlement. Decant the required amount of Base A into a clean container by weight using digital scales. Add Hardener B to the Base A container and drain thoroughly. Mix with a slow-speed drill and helical spinner head for 60 seconds, taking care not to entrain air. Add Filler C to achieve the desired consistency. Mix until uniform.

## Application Method

Method	Airless sprays	Brush (touch-up)
Thinner (max. vol.)	EX-T-1 (10-30%)	Ex-T-1 (5%)
Pump ratio minimum	40:1	
Tip size	0.021"–0.019"	
Tip pressure	150 bar/2100 Psi	
Cleaning of tools	EX-T-1	
Indicated film thickness, dry	75 microns	
Indicated film thickness, wet	100 microns	

**Conditions:** Do not apply when relative humidity exceeds 80% or when the surface to be coated is less than 3°C above the dew point.

## Storage

Time	12 Months in Unopened Packs.
Temperature	Storage temperature between 5°C and 35°C.
Protection	Should be stored inside and protected from frost, weather, moisture, direct sunlight and contamination ingress.

## Remarks

Preceding Coat	Epoxy primers such as PRIMIT or RICHOPXZ.
Subsequent Coat	Epoxy and polyurethane top coat such as POLYURIT or CINDOPOX.

A completely clean surface is mandatory to ensure inter-coat adhesion, especially at long recoating intervals. Any dirt, oil, and grease

have to be removed, e.g., with suitable detergent.

Salts should be removed by freshwater hosing. To check the adequate quality of the surface cleaning a test patch is recommended before actual recoating.

## Film Thickness


May be specified in another film thickness than indicated depending on purpose and area of use.

This will alter the spreading rate and may influence drying time and recoating intervals. The normal range is 50-125 microns/ 2-5 mils.

## Recoating and drying/curing time

Recoating intervals related to later conditions of temperature:

Temperature	Time (Hours)
25°C	8-72
20°C	12-96
15°C	24-96

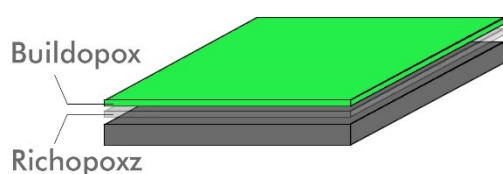


## Safety

Handle with care. Before and during use, observe all safety labels on packaging and paint containers, consult ChemStuk material safety data sheets and follow all local and national safety regulations. Harmful or fatal if swallowed; immediately seek medical

assistance. Avoid inhalations of possible solvent vapours or paint mist, as well as paint contact with skin and eyes. Apply only on well-ventilated areas and ensure that adequate forced ventilation exists when applying paint in confined spaces or when the air is stagnant. Always take precautions against the risks of fire and explosions.

## Application Equipment

The use of correct application equipment is critical as incorrect application tools can result in poor finishing and incorrect material consumption. Always test the application equipment prior to commencing work. The following equipment is recommended for this application.

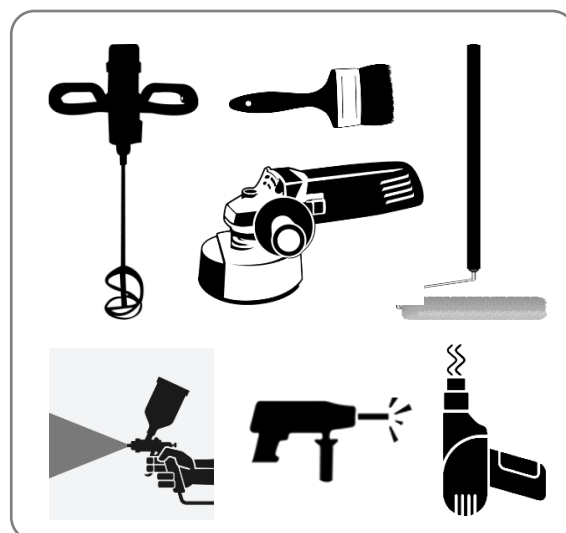

## DISCLAIMER

This Technical Data Sheet is to be used as a guide only; it is NOT a specification. Chemstuk Pty Ltd has no control over the use or storage of this product and therefore does not accept liability in this regard. Any verbal advice given should not be regarded as authoritative information. This information is subject to change without notice, therefore all applicators should ensure they have current information. This product is intended for the use only of skilled tradesman and where applicable, statutory licensed tradesmen experienced and trained in the use of this product. Due to differences in substrates, application methods and local conditions purchasers of these products must ensure that it is suitable for their specific application before using these products. While the information contained in the TDS and SDS is accurate to the best of our knowledge, Chemstuk Pty Ltd cannot guarantee that the information contained is wholly comprehensive. Subject to the provisions of the Trade Practices Act, the company's liability in relation to defective products shall be limited to replacement of the product, if the product is proven to be defective.